

# Worst Served Customers

2024/25 Stakeholder Report







## 1. Contents

2.	Glossary		4
3.	Background Information		5
4.	Project Breakdown		6
4.1.	SP Distribution	6	
4.2.	SP Manweb	85	



## 2. Glossary

**ACRONYM** Definition

AM&I Asset Management & Investment

**ED1** Abbreviated version of RIIO-ED1

**ED2** Abbreviated version of RIIO-ED2

RIIO Revenue = Incentives + Innovation + Outputs

RIIO-ED1 The price control period for Electricity Distribution during the years 2015-2023

RIIO-ED2 The price control period for Electricity Distribution during the years 2023-2028

**SPD** SP Distribution

**SPEN** SP Energy Networks

**SPM** SP Manweb

WSC Worst Served Customer



## 3. Background Information

Ofgem defines Worst Served Customers (WSCs) in RIIO-ED2 as follows:

- 1. A customer who has experienced 12 or more unplanned interruptions in the previous 3-year period.
- 2. A customer who has experienced at least 2 unplanned interruptions in each of the 3 years.

Note: An outage is only considered an interruption if it is unplanned and lasts more than 3 minutes.

As of the 31st of March 2025 the total number of customers qualifying under the criteria was 6,176.

SP Energy Networks (SPEN) covers two licence areas. Below is a breakdown of how many WSCs are in each licence area:

Date	Total Number WSCs	WSCs SPD	WSCs SPM
31/03/2024	7,248	3,779	3,469
31/03/2025	6,176	3,000	3,176

Between the 1st of April 2024 and the 31st of March 2025, a total of 35 schemes to improve service for the WSCs were identified:

	Total Schemes	Planning	Delivery	Complete
SPD	22	19	3	0
SPM	13	8	5	0
SPEN Total	35	27	8	0

In the first 2 years of RIIO-ED2, a total of 119 schemes to improve service for the WSCs were identified:

	Total Schemes	Planning	Delivery	Complete
SPD	77	46	18	13
SPM	42	13	18	11
SPEN Total	119	59	36	24

Both the regulatory mechanism and the definition of a WSC changed between ED1 and ED2.

These positive changes have made the funding mechanism more accessible in ED2 than previously, this has the positive effect of increasing activity in ED2, but as delivery is often multiyear, the effects of this will not be realised until later in ED2.

Although there are few completed schemes, many projects are split into various stages under the delivery stage. As such, works have been carried out which are already improving service for the WSCs.



# 4. Project Breakdown

The details of each project are shown below.

#### 4.1. SP Distribution

SP Distribution covers the Central belt of Scotland. The below figures show the areas covered along with a view of where the current WSC circuits with open schemes are:

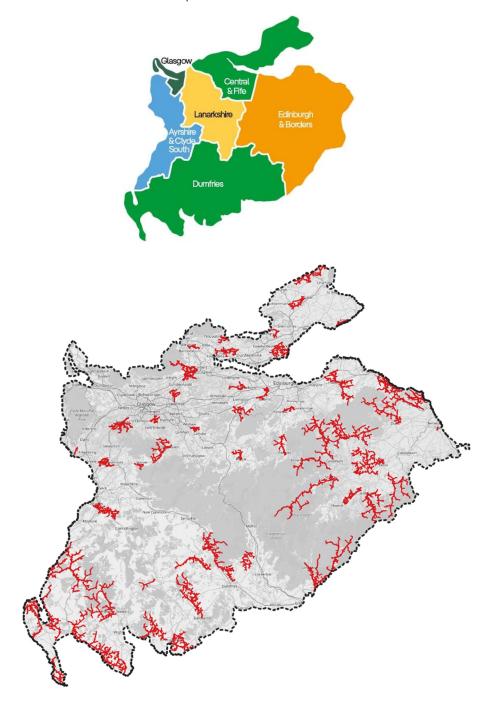


Figure 1a & 1b - Map View of SP Distribution with District & Current ED2 WSC schemes.



District	Primary Substation	Project Name	Page
Ayrshire	AURS RD	AURS RD-40213-WSC	28
Ayrshire	GIRVAN	GIRVAN-73524-WSC	33
Ayrshire	GLENGALL	GLENGALL-73615-WSC	34
Ayrshire	KILMARNOCK	KILMARNOCK-71415-WSC	32
Ayrshire	NEWMILNS	NEWMILNS -72024-WSC	61
Ayrshire	PINWHERRY	PINWHERRY-74822-WSC	81
Ayrshire	PINWHERRY	PINWHERRY-74823-WSC	78
Ayrshire	SALTCOATS MAIN	SALTCOATS MAIN-72414-WSC	39
Central & Fife	ANSTRUTHER	ANSTRUTHER-19113-WSC	77
Central & Fife	BOWHILL	BOWHILL-16912-WSC	25
Central & Fife	BROXBURN TOWN	BROXBURN TOWN-95722-WSC	65
Central & Fife	BURNTISLAND	BURNTISLAND-17014-WSC	80
Central & Fife	COLQUHOUN STREET	COLQUHOUN STREET-90916-WSC	21
Central & Fife	CUPAR	CUPAR-18512-WSC	26
Central & Fife	DOLLAR	DOLLAR-91311-WSC	43
Central & Fife	FORGAN	FORGAN -18713-WSC	46
Central & Fife	FORGAN	FORGAN-18723-WSC	27
Central & Fife	GARTARRY	GARTARRY -91811-WSC	41
Central & Fife	MYOTHILL	MYOTHILL-99113-WSC	14
Central & Fife	MYOTHILL	MYOTHILL-99122-WSC	37
Central & Fife	MYOTHILL	MYOTHILL-99124-WSC	38
Central & Fife	RAITH	RAITH-17214-WSC	55
Central & Fife	WEST CALDER	WEST CALDER-96412-WSC	36
Dumfries	AUCHNEEL PRIMARY	AUCHNEEL PRIMARY-68922-WSC	9
Dumfries	AUCHNEEL PRIMARY	AUCHNEEL PRIMARY-68923-WSC	69
Dumfries	BARRHILL	BARRHILL-66313-WSC	74
Dumfries	DALBEATTIE	DALBEATTIE-66811-WSC	17
Dumfries	GATEHOUSE	GATEHOUSE-67111-WSC	10
Dumfries	GATEHOUSE	GATEHOUSE-67112-WSC	11
Dumfries	GLENLEE HYDRO ST	GLENLEE HYDRO ST-65521-WSC	29
Dumfries	GLENLUCE	GLENLUCE-67212-WSC	73
Dumfries	GLENLUCE	GLENLUCE-67213-WSC	45
Dumfries	HEATHHALL	HEATHHALL-67723-WSC	66
Dumfries	KIRKBANK	KIRKBANK-67511-WSC	71
Dumfries	NEWTON STEWART	NEWTON STEWART-68423-WSC	84
Dumfries	PENPONT	PENPONT-68511-WSC	20
Dumfries	PENPONT	PENPONT-68522-WSC	30
Dumfries	SORBIE	SORBIE-68611-WSC	31
Dumfries	SORBIE	SORBIE-68622-WSC	82
Dumfries	STRANRAER	STRANRAER-68814-WSC	58
Dumfries	TONGLAND	TONGLAND-69012-WSC	15
Edinburgh & Borders	AYTON	AYTON-12021-WSC	76




District	Primary Substation	Project Name	Page
Edinburgh & Borders	DEANS CLOSE	DEANS CLOSE-11022-WSC	44
Edinburgh & Borders	DENHOLM	DENHOLM-12521-WSC	42
Edinburgh & Borders	DUNS	DUNS-11413-WSC	48
Edinburgh & Borders	EARLSTON	EARLSTON-13222-WSC	40
Edinburgh & Borders	EYEMOUTH	EYEMOUTH-13117-WSC	75
Edinburgh & Borders	GLENDINNING	GLENDINNING-12813-WSC	62
Edinburgh & Borders	GORDON	GORDON-10914-WSC	23
Edinburgh & Borders	INNERLEITHEN	INNERLEITHEN-12723-WSC	56
Edinburgh & Borders	KINGSLAND	KINGSLAND-11512-WSC	72
Edinburgh & Borders	KINGSLAND	KINGSLAND-11524-WSC	51
Edinburgh & Borders	KIRKNEWTON	KIRKNEWTON-96313-WSC	59
Edinburgh & Borders	LAUDER	LAUDER-13013-WSC	52
Edinburgh & Borders	LAUDER	LAUDER-13014-WSC	53
Edinburgh & Borders	LAUDER	LAUDER-13015-WSC	54
Edinburgh & Borders	LOANING	LOANING-11225-WSC	70
Edinburgh & Borders	MOREBATTLE	MOREBATTLE-11614-WSC	60
Edinburgh & Borders	NEWCASTLETON	NEWCASTLETON-12313-WSC	63
Edinburgh & Borders	OAKFIELD	OAKFIELD-10612-WSC	47
Edinburgh & Borders	PEPPERCRAIG	PEPPERCRAIG-32512-WSC	19
Edinburgh & Borders	PEPPERCRAIG	PEPPERCRAIG-32514-WSC	16
Edinburgh & Borders	SELKIRK	SELKIRK-10522-WSC	22
Edinburgh & Borders	ST BOSWELLS	ST BOSWELLS-12914-WSC	24
Edinburgh & Borders	TORNESS	TORNESS-34413-WSC	49
Edinburgh & Borders	TORNESS	TORNESS-34424-WSC	83
Edinburgh & Borders	WHITCHESTER	WHITCHESTER-12412-WSC	64
Edinburgh & Borders	WHITCHESTER	WHITCHESTER-12413-WSC	57
Edinburgh & Borders	YAIR BRIDGE	YAIR BRIDGE-10711-WSC	79
Edinburgh & Borders	YETHOLM	YETHOLM-11713-WSC	68
Glasgow	WHITLAWBURN	WHITLAWBURN-56525-WSC	12
Lanarkshire	BIGGAR	BIGGAR-82212-WSC	35
Lanarkshire	GARTSHERRIE	GARTSHERRIE-84212-WSC	50
Lanarkshire	OLD INNS	OLD INNS-98124-WSC	13
Lanarkshire	OVERTOWN	OVERTOWN-86423-WSC	18
Lanarkshire	STRATHAVEN	STRATHAVEN-86812-WSC	67



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-001 2023 AUCHNEEL PRIMARY-68922-WSC					
Description					

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements., Identification of and clearance of unknown defects, installation of bird flight divertors, undergrounding a section of problematic overhead line and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

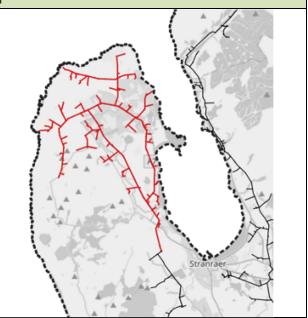

	Evidence of Relevant Optioneering						
	WSC Project option	ons consider	ed, costs assoc	siated with each option and analysis of the options considered			
# Option Costs (£k) Decision Analysis				Analysis			
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Telecontrol only	Telecontrol only 15.00 Considered		Would improve service for some WSCs but better options available			
3	Refurbishment	245.00	Considered	Would improve service for some WSCs but better options available			
4	Rebuild	1,500.00	Adopted	Best option available - encompasses above and best impact for WSCs			


WSC Project Details					
Network location of the	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)		
SP68922	134	2026	206		

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-002 2023 GATEHOUSE-67111-WSC						
	Description						

The specific works being proposed to be carried out are: Pole mounted switch with telecontrol, the strategic deployment of additional Network Control Equipment which reduces the number of customers that experience a fault.

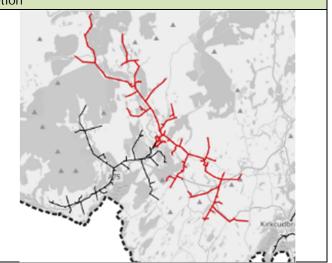

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSCs			
2	Interconnect overhead line	1,000.00	Rejected	Cost and time versus for benefit			
3	Additional protection	17.00	Considered	Provides best benefit for WSC			
4	Planned modifications	0	Rejected	Development to improve system for WSC			
5	Network control point work and reconfiguration	7.38	Considered	Provides optimal improvement in shortest timeframe			
6	Updated circuit breaker instalment	8.00	Considered	Provides optimal improvement in shortest timeframe			
7	Pole mounted switch protection, network control point installations	32.38	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details						
Network location of the WSC	Number of WSC planned WSC	Expected	Expected cost of WSC Project			
Project	Project is expected to benefit	completion date	(£k)			
SP67111	19	2025	32.38			


WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	19.43		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-003	GATEHOUSE-67112-WSC					

The specific works being proposed to be carried out are: Modernisation and network control point work.

0.6km of new conductor, Vegetation management over and above our statutory (ENA TS 43/8) requirements., defect clearance, reconfiguration, bird flight divertors, overhead lines transferred to underground.

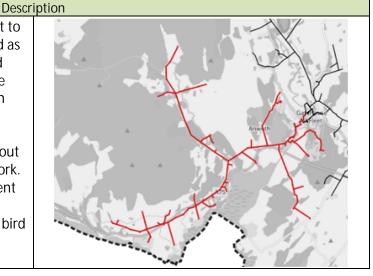

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	op	tion and anal	ysis of the op	otions considered				
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Planned modifications	0	Rejected	Development to improve system for WSC				
3	Additional network control points only	30.00	Rejected	Insufficient				
4	Modernisation with network control points	602	Considered	Within Dumfries 2023 T&M Plan				
5	Network control point and reconfiguration work	24	Adopted	Provides optimal improvement in shortest timeframe				


WSC Project Details						
Network location of	Number of WSC planned WSC Project	Expected completion	Expected cost of WSC Project			
the WSC Project	the WSC Project is expected to benefit		(£k)			
SP67112 46		2026	82			

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-004	WHITLAWBURN-56525-WSC					
	Description					

The specific works being proposed to be carried out are: Additional protection on system and strategic deployment of additional Network Control Equipment, network reconfiguration, overhead line shrouding and re-regulation of the conductors, clearance of hazards and defects.

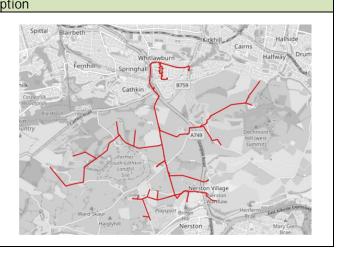

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	op:	tion and anal	ysis of the opti	ons considered				
# Option Costs (£k)		Decision	Analysis					
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Planned modifications	350	Rejected	Modification planned in ED3				
3	Network control point and reconfiguration work	216.00	Adopted	Provides optimal improvement in shortest timeframe				


	WSC Project Details						
Network location of the WSC   Number of WSC planned WSC			Expected	Expected cost of WSC Project			
	Project	Project is expected to benefit	completion date	(£k)			
	SP56525	137	2026	216			

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	11.77			



Background Information on WSC Projects								
WSC Project Reference Number	Year qualified	Name of WSC Project						
SPD-WSC-SA-005	2021	OLD INNS-98124-WSC						

The specific works being proposed to be carried out are: Additional protection on system and strategic deployment of additional Network Control Equipment, which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions.

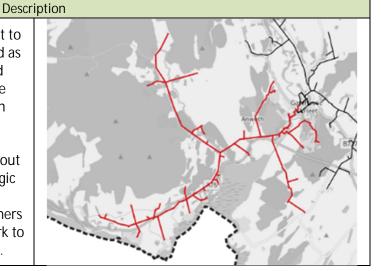

Evidence of Relevant Optioneering							
WSC Project options considered, costs associated with each							
	option	n and analysi	s of the optio	ns considered			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Planned modifications	420	Rejected	Modification planned in ED3			
3	Network control point work	60.00	Considered	Improves system by reducing fault times			
4	Network control point work and reconfiguration	2.37	Adopted	Improves system by reducing fault times			


WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
SP67112	451	2026	62.37			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	4.21		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-006	MYOTHILL-99112-WSC					
Description						

The specific works being proposed to be carried out are: Addition of network control points. Overlay of 145m of HV cable. Loop Thornton Avenue into the mainline and remove previous supply spur.

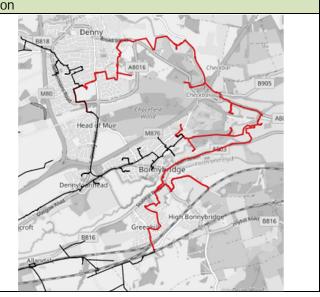

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Planned modifications	0	Rejected	Not in plan			
3	Removal of spur and loop in substation, overlay cable and installation of optimum telecontrol devices	162.09	Adopted	Improves system by reducing fault times and furthers life span			

WSC Project Details						
Network location of	Number of WSC planned WSC	Expected	Expected cost of WSC Project (£k)			
the WSC Project	the WSC Project   Project is expected to benefit   completion date					
SP99112	1219	2026	162.09			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	46.82		



Background Information on WSC Projects						
WSC Project Reference Number	Name of WSC Project					
SPD-WSC-SA-007	TONGLAND-69012-WSC					
Description						



	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option and a	analysis	of the options c	onsidered			
# Option Costs (£k) Decisi			Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Planned modifications	420	Rejected	Modification planned in ED3			
3	Additional protection works	39.00	Considered	Protects the system from faults therefore reduction of WSC			
4	Protection works, Network control	32.00	Adopted	Provides optimal improvement in shortest			

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected cost of WSC Project (£k)				
SP69012	131	2026	73.09			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	2.09			



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPD-WSC-SA-008	2023	PEPPERCRAIG-32514-WSC				
	Description					
Targeted works shall be carried out or reduce interruptions for the customer "Worst Served" through the identif implementation of solutions that m improvement for these customers assessment of the circuit and its fa	rs identified as ication and aximise the cased on an ult history.	Haddirigree				
The specific works being proposed to are: The strategic deployment of addit Control Equipment, which reduces th customers that experience a fault. Veg works also.	ional Network ne number of					

	Evidence of Relevant Optioneering							
WSC Project options considered, costs associated with each option and analysis of the options considered								
	#	Option	Costs (£k)	Decision	Analysis			
	1	Do Nothing	0.00	Rejected	No improvement for WSC			
	2	Network control point only	31	Rejected	Improvement inadequate			
	3	Network control points reconfiguration work % ETR 132 vegetation works	331.00	Adopted	In conjunction with the modernisation gives the best improvement for the WSC			

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
SP32514	412	2025	331			

	WSC Project Progress Update						
	WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
ĺ	Completed	-	-	31/03/2025	23.66		



Background Information on WSC Projects								
WSC Project Reference Number	Year qualified	Name of WSC Project						
SPD-WSC-SA-009	2023	DALBEATTIE-66811-WSC						
	Description							
Targeted works shall be carried our reduce interruptions for the custor "Worst Served" through the ide implementation of solutions that improvement for these custome assessment of the circuit and its	mers identified as ntification and t maximise the ers based on an s fault history.							
The specific works being proposed are: The strategic deployment of ac Control Equipment, which reduce customers that experience	dditional Network s the number of							

Evidence of Relevant Optioneering							
WSC Project options considered, costs associated with each option and analysis of the options considered							
	טףנוטוז מווע מ	marysis or the	options consider	eu			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Planned modifications	0	Rejected	Modification planned for ED3			
3	Network control point reconfiguration work	8.00	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details					
Network location Number of WSC planned WSC Project is Expected completion Expected cost of WSC					
of the WSC Project	expected to benefit	date	Project (£k)		
SP66811	46	2026	8		

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	2.91			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-010 2023 OVERTOWN-86423-WSC					
	Б 1 11				

The specific works being proposed to be carried out are: Modernisation and reconfiguration work, Initial reviews of protection to Howlands spur. Bird divertors added to overhead line. Shrouding on pole mounted transformers and spacers on LV overhead lines. Replacement of 11kV underground cable.



#### **Evidence of Relevant Optioneering**

WSC Project options considered, costs associated with each option and analysis of the options considered

#	Option	Costs (£k)	Decision	Analysis
1	Do Nothing	0.00	Rejected	No improvement for WSC
2	Planned modifications	240	Rejected	Overhead line modifications planned in ED4; Cable in ED3
3	Modernisation and reconfiguration work	135.00	Adopted	Provides improvement in shortest timeframe

	WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)				
SP86423	5	2026	135				

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	6.01			



Background Information on WSC Projects						
WSC Project Reference Number	WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-011 2023 PEPPERCRAIG-32512-WSC						
	·	·				



Evidence of Relevant Optioneering						
WSC Project options considered, costs associated with each						
	option and a	inalysis of the	options consi	dered		
#	Option	Costs (£k)	Decision	Analysis		
1	Do Nothing	0.00	Rejected	No improvement for WSC		
2	Planned modifications	0	Rejected	Modification planned for ED3		
3	Network control points reconfiguration work	31.50	Adopted	Provides optimal improvement in shortest timeframe		

WSC Project Details						
Network location	Network location Number of WSC planned WSC Project is Expected completion Expected cost of WSC					
of the WSC Project expected to benefit date Project (£k)						
SP32512	226	2025	31.5			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Completed	-	-	31/03/2025	352.14			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-012 2023 PENPONT-68511-WSC					
Description					

The specific works being proposed to be carried out are: Additional and replacement protection systems. Vegetation management over and above our statutory (ENA TS 43/8) requirements. in Auldgirth Housing area. The strategic deployment of additional Network Control Equipment, which reduces the number of customers that experience a fault.



	Evidence of Relevant Optioneering							
WSC Project options considered, costs associated with each option and analysis of the options considered								
#								
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2 Planned modifications 0 Rejected Modification plans				Modification planned for ED3				
3	Additional protection works	88.42	Considered	Protects system from faults				
4	Network control points and reconfiguration work	8.00	Adopted	Provides optimal improvement in shortest timeframe				


WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
SP68511	244	2026	96.42			

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	-	66.24	



Background Information on WSC Projects					
WSC Project Reference Number	WSC Project Reference Number Year qualified Name of WSC Project				
SPD-WSC-SA-013	SPD-WSC-SA-013 2022 COLQUHOUN STREET-90916-WSC				
Description					

The specific works being proposed to be carried out are: Alteration of the LV and 11kV network, undergrounding of 11kV overhead line and installation/relocation of auto-recloser and telecontrol.

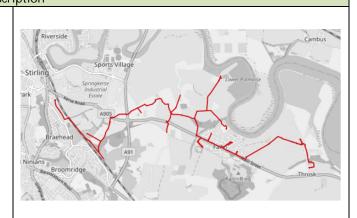

Evidence of Relevant Optioneering						
WSC Project options considered, costs associated with each						
	option and analysis	of the option	s considered			
#	# Option Costs (£k) Decision Analysis					
1	Do Nothing	0.00	Rejected	No improvement for WSC		
2	Planned modifications	0	Rejected	Not in plan		
3	Whole proposal, LV Mods, undergrounding of overhead line and installation of optimum telecontrol devices	150.00	Adopted	Provides optimal improvement in shortest timeframe		

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP90916	125	2026	150		

	WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	•	-	0		



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-014 2023 SELKIRK-10522-WSC					
Description					




Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each						
	option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1 Do Nothing 0.00 Rejected				No improvement for WSC			
2	Network control point work and reconfiguration	9.86	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details					
Network location	Number of WSC planned WSC Project is	Expected completion	Expected cost of WSC		
of the WSC Project	expected to benefit	date	Project (£k)		
SP10522	38	2025	9.86		

	WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	8.9		



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-015 2023 GORDON-10914-WSC					
C	Year qualified				

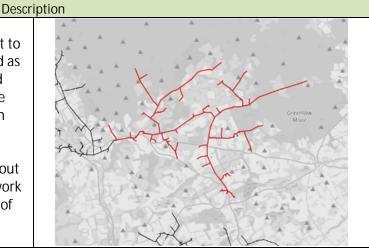


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option	and ana	alysis of the opti	ons considered			
#	Option	Costs (£k)	Decision	Analysis			
1	1 Do Nothing 0.00 Rejected No improvement for WSC						
2	Network control point work and reconfiguration	10.81	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP10914	160	2026	10.81		

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	-	9.76	



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-016 2023 ST BOSWELLS-12914-WSC						
	5 1					

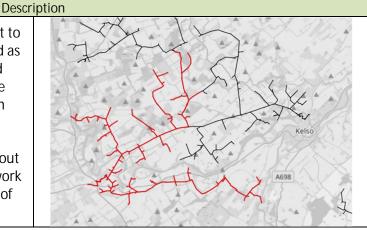


	Evidence of Relevant Optioneering						
				s associated with each			
	option	and ana	alysis of the opti	ons considered			
#	Option	Costs (£k)	Decision	Analysis			
1 Do Nothing 0.00 Rejected No improvement for WSC							
2	Network control point work and reconfiguration	10.42	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP12914	8	2026	10.42		

	WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	9.89		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-017 2023 BOWHILL-16912-WSC						
	5 1					

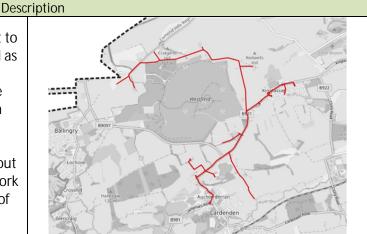

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	8.35	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details						
Network location Number of WSC planned WSC Project is Expected completion Expected cost of WSC						
of the WSC Project	expected to benefit	date	Project (£k)			
SP16912	20	2025	8.35			

	WSC Project Progress Update						
WSC Project status  Number of WSC that the delivered WSC Project is intended to benefit  Number of WSC that the planned WSC Project benefit and delivered WSC Project benefit				Annual cost of the WSC Project (£k)			
Completed	-	-	31/03/2025	0			



Background Information on WSC Projects							
WSC Project Reference Number Year qualified Name of WSC Project							
SPD-WSC-SA-018	2017		CUPAR-18512-WSC				
Description							
Targeted works shall be carried out	on this circuit to	2	A92				
reduce interruptions for the custom	ers identified as	* 1 3 TE 1	1 18 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				

reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.




	Evidence of Relevant Optioneering						
WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis			
1 Do Nothing 0.00 Rejected No improvement for WSC				No improvement for WSC			
2	Network control point work and reconfiguration	2.09	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details						
Network location Number of WSC planned WSC of the WSC Project is expected to benefit Expected completion date (£k)						
SP18512	12	2025	2.09			

	WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-019 2022 FORGAN-18723-WSC						

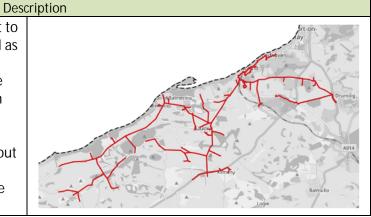


Evidence of Relevant Optioneering						
WSC Project options considered, costs associated with each						
	option	and analysis of t	he options con	sidered		
#	Option	Costs (£k)	Decision	Analysis		
1 Do Nothing 0.00 Rejected No improvement for WSC				No improvement for WSC		
2	Network control point work and reconfiguration	6.26	Adopted	Provides optimal improvement in shortest timeframe		

WSC Project Details						
Network location						
of the WSC Project	expected to benefit	completion date	Project (£k)			
SP18723	49	2025	6.26			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Completed	-	-	31/03/2025	0			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-020 2023 AURS RD-40213-WSC						

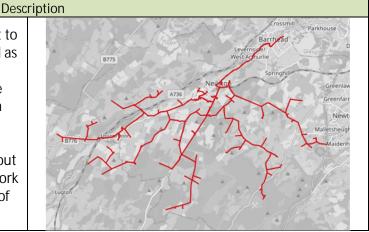


	Evidence of Relevant Optioneering						
WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis			
1 Do Nothing 0.00 Rejected No improvement for WSC				No improvement for WSC			
2	Network control point work and reconfiguration	29.50	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details				
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)	
SP40213	82	2026	29.50	

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	-	15.01	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-021 2023 GLENLEE HYDRO ST-65521-WSC					

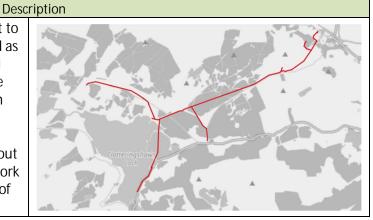

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	16.25	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details				
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)	
SP65521	7	2025	16.25	


WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Completed	-	-	31/03/2025	0	



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-022 2019 PENPONT-68522-WSC						
Description						

Description

Targeted works shall be carried out on this circuit to reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.

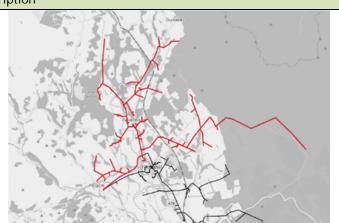

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	optio	on and analysis	of the options conside	ered			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	10.02	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP68522	13	2025	10.02		


WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Completed	-	-	31/03/2025	0	



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPD-WSC-SA-023	2021	SORBIE-68611-WSC				

Description

Targeted works shall be carried out on this circuit to reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.

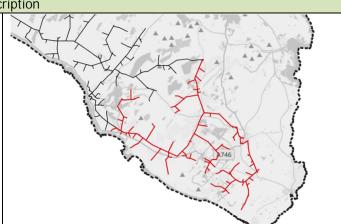

Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each						
	option a	and analysis of the	e options consider	red			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	2.09	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details				
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)	
SP68611	220	2025	2.09	

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Completed	-	-	31/03/2025	0	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-024 2020 KILMARNOCK-71415-WSC					




Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each						
option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	8.57	Adopted	Provides optimal improvement in shortest timeframe			

WSC Project Details					
Network location	Number of WSC planned WSC	Expected completion date	Expected cost of WSC		
of the WSC Project	Project is expected to benefit	p	Project (£k)		
SP71415	1	2026	8.57		

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	1	0	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-025 2017 GIRVAN-73524-WSC					

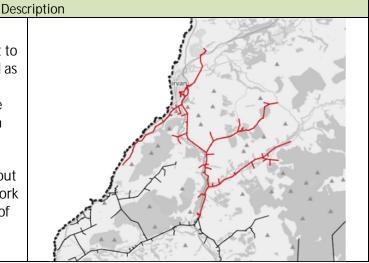


Evidence of Relevant Optioneering						
WSC Project options considered, costs associated with each						
	option and analysis of the options considered					
#	Option	Costs (£k)	Decision	Analysis		
1	Do Nothing	0.00	Rejected	No improvement for WSC		
2	Network control point work and reconfiguration	11.17	Adopted	Provides optimal improvement in shortest timeframe		

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP73524	33	2025	11.17		

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Completed	-	-	31/03/2025	0	



	Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-026 2023 GLENGALL-73615-WSC						

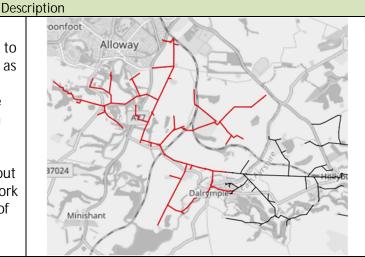


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	63.53	Considered	Provides improvement in short timeframe			
3	Undergrounding of Overhead Line	180	Considered	Helps Specific customers, connected to the overhead section(s)			
4	Combination of options 2 & 3	243.53	Considered	Best for optimal improvement			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP73615	232	2026	63.53		

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	6.19		



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-027 2019 BIGGAR-82212-WSC					

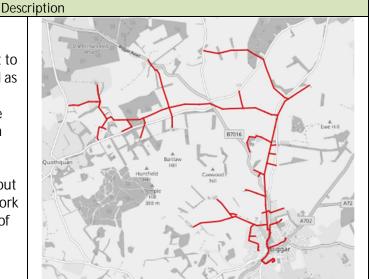


Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each					
	option and analysis of the options considered					
# Option Costs (£k) Decision Analysis				Analysis		
1 Do Nothing 0.00 Rejected No imp			No improvement for WSC			
2	Network control point work and reconfiguration  29.4  Adopted  Provides optimal improvement in shortest timeframe					

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
SP82212	113	2025	29.4		

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Completed	-	-	31/03/2025	0			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-028 2019 WEST CALDER-96412-WSC					
Description					

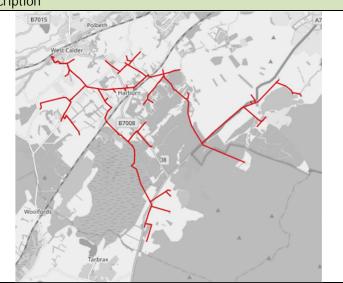

	Evidence of Relevant Optioneering					
	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	# Option Costs (£k) Decision Analysis					
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs		
Work and Reconfiguration to Network Control Points  10.86  Adopted  Best option available - Provides o improvement in shortest timefr						


WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
SP96412						

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	10.11		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-029 2021 MYOTHILL-99122-WSC						
Description						

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduce the number of customers that experience a fault.

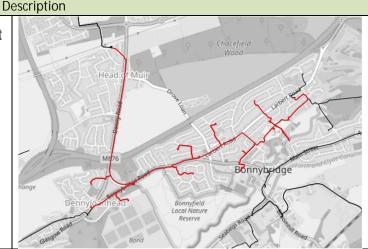

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Work and Reconfiguration to Network Control Points	2.09	Adopted	Best option available - Provides optimal improvement in shortest timeframe				


WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP99122	3	2026	2.09				

WSC Project Progress Update								
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				



Background Information on WSC Projects					
WSC Project Reference Number  Year qualified Name of WSC Project					
SPD-WSC-SA-030 2020 MYOTHILL-99124-WSC					
Description					

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduce the number of customers that experience a fault.

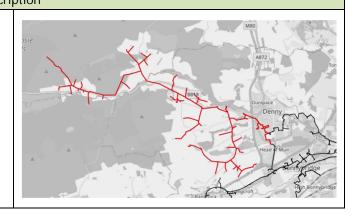

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Work and Reconfiguration to Network Control Points	31.58	Adopted	Best option available - Provides optimal improvement in shortest timeframe			

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP99124	64	2026	31.58				

WSC Project Progress Update								
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Delivery	-	-	-	29.72				



	Background Information on WSC Projects							
ĺ	WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-031 2023 SALTCOATS MAIN-72414-WSC							
ĺ	Description							



	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points  24.00 Considered Would provide optimal improvement for WSCs		Would provide optimal improvement for WSCs					
4	Combination of options 2 & 3	24.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project (£k)						
SP72414	15	2026	24				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-032 2022 EARLSTON-13222-WSC						
	Description						



	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points  16.00 Considere		Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	16.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP13222	5	2026	16				


WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
	WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-033 2023 GARTARRY-91811-WSC							

Description

Targeted works shall be carried out on this circuit to reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.

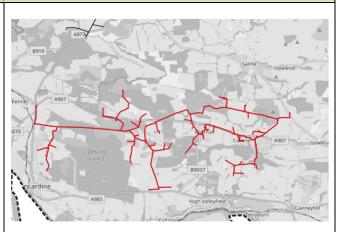

	Evidence of Relevant Optioneering						
,	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing 0.00 Re		Rejected	Does nothing to improve the service for the WSCs			
2	Planned Modifications	Planned Modifications - Co		Would improve service for WSCs			
3	Work and Reconfiguration to Network Control Points			Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	16.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP91811	10	2026	16				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			




	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
Γ	SPD-WSC-SA-034 2022 DENHOLM-12521-WSC						

Description

Targeted works shall be carried out on this circuit to reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.

The specific works being proposed to be carried out are: The installation of bird flight divertors and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

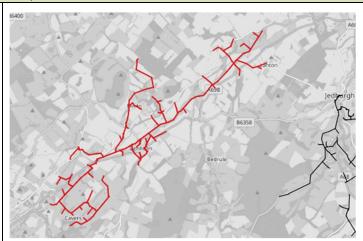


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision  1 Do Nothing 0.00 Rejected		Analysis					
1			Does nothing to improve the service for the WSCs					
2	Rebuild	100.00	Rejected	This was undertaken recently in 2017				
3	Planned Modifications	-	Considered	Would provide improvement for WSCs				
4	Work and Reconfigurations During Planned Modifications	32	Adopted	Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP912521	8	2026	32				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



Background Information on WSC Projects						
WSC Project Reference Number	Name of WSC Project					
SPD-WSC-SA-035 2022 DOLLAR-91311-WSC						
Description						

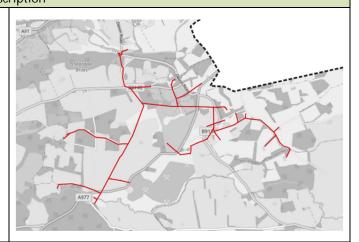


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	1 Do Nothing 0.00 Rejected		Does nothing to improve the service for the WSCs					
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3 Work and Reconfiguration to Network Control Points 24.00 Conside		Considered	Would provide optimal improvement for WSCs					
4	Combination of options 2 & 3	24.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP91311	24	2026	24				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-036 2023 DEANS CLOSE-11022-WSC						
	Description						

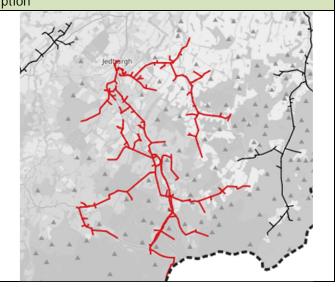

	Evidence of Relevant Optioneering								
	WSC Project options considered, costs associated with each option and analysis of the options considered								
#	Option	Costs (£k)	Decision	Analysis					
1	1 Do Nothing 0.00		Rejected	Does nothing to improve the service for the WSCs					
2	Planned Modifications	-	Considered	Would improve service for WSCs					
3	Work and Reconfiguration to Network Control Points	16.00	Considered	Would provide optimal improvement for WSCs					
4	Combination of options 2 & 3	16.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions					

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP911022	37	2026	16				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project						
Ī	SPD-WSC-SA-037 2023 GLENLUCE-67213-WSC					
I	Description					




	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1 Do Nothing 0.00 Rejected		Does nothing to improve the service for the WSCs						
2 Planned Modifications - Consider		Considered	Would improve service for WSCs					
Work and Reconfiguration to Network Control Points 8.00 Consider		Considered	Would provide optimal improvement for WSCs					
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP67213	14	2026	8				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



	Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project						
	SPD-WSC-SA-038 2023 FORGAN-18713-WSC					
	Description					

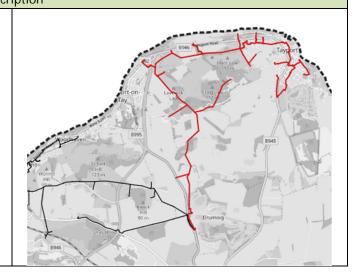


	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision				Analysis				
1	1 Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications - (		Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points 8.00 Consider		Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP18713	6	2026	8				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



	Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project						
	SPD-WSC-SA-039 2023 OAKFIELD-10612-WSC					
	Description					

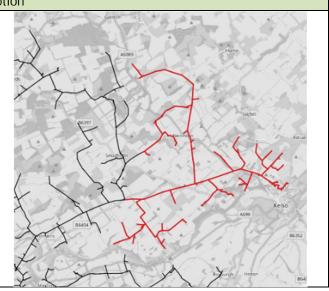


	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision				Analysis				
1	Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
Work and Reconfiguration to Network Control Points		24.00	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3 24.00 Add		Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP10612	113	2026	24				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-040 2023 DUNS-11413-WSC						
	Description						

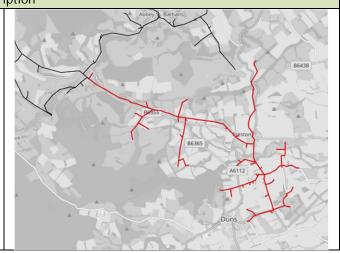


	Evidence of Relevant Optioneering						
,	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	(EK)		Decision	Analysis			
1			Rejected	Does nothing to improve the service for the WSCs			
2 Planned Modifications		90.00	Considered	Would improve service for WSCs			
3	Work and Reconfiguration to Network Control Points 24.00 Consider		Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	114.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

	WSC Project Det	tails	
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC
WSC Project	Project is expected to benefit	date	Project (£k)
SP11413	149	2026	114.00

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
	WSC Project Reference Number	Year qualified	Name of WSC Project				
SPD-WSC-SA-041         2023         TORNESS-34413-WSC							
ſ	Description						

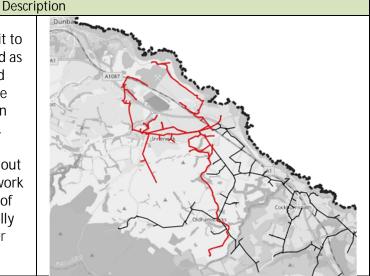

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision  1 Do Nothing 0.00 Rejected  2 Planned Modifications - Considered  3 Work and Reconfiguration to Network Control Points 8.00 Considered		Analysis				
1			Rejected	Does nothing to improve the service for the WSCs			
2			Would improve service for WSCs				
3			Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP34413	16	2026	8				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



Background Information on WSC Projects					
WSC Project Reference Number	Year qualified	Name of WSC Project			
SPD-WSC-SA-042	GARTSHERRIE-84212-WSC				
December 1					



	Evidence of Relevant Optioneering						
,	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision Analysis			Analysis				
1	Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs			
2	Planned Modifications	-	Considered	Would improve service for WSCs			
Work and Reconfiguration to Network Control Points 8.00 Considered Would		Would provide optimal improvement for WSCs					
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP84212	23	2026	8				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	1	0			



	Background Information on WSC Projects					
	WSC Project Reference Number	Name of WSC Project				
SPD-WSC-SA-043 2022 KINGSLAND-11524-WSC						
	Description					




	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision Analysis		Analysis					
1	1 Do Nothing 0.00 Rejected		Does nothing to improve the service for the WSCs				
2	Planned Modifications - Considered		Considered	Would improve service for WSCs			
3	Work and Reconfiguration to Network Control Points  8.00  Considered		Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP11524	14	2026	8				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-044 2022 LAUDER-13013-WSC						
	Description						

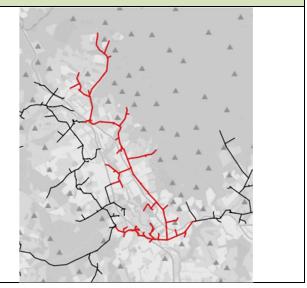


	Evidence of Relevant Optioneering						
,	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	1 Do Nothing C		Rejected	Does nothing to improve the service for the WSCs			
2	Planned Modifications	-	Considered	Would improve service for WSCs			
3	Work and Reconfiguration to Network Control Points	25.00	Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	25.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details								
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC								
WSC Project	Project is expected to benefit	date	Project (£k)					
SP13013	13	2026	25					

	WS	SC Project Progress Update		
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)
Planning	-	-	-	0



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-045 2023 LAUDER-13014-WSC						
	Description						

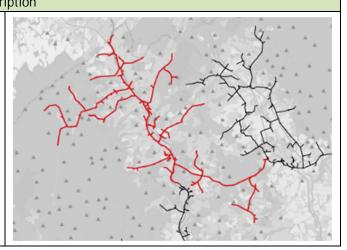

	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	1 Do Nothing 0.00 Reject		Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points	24.00	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	24.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected co							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP13014	8	2026	24				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-046 2023 LAUDER-13015-WSC					
Description					




	Evidence of Relevant Optioneering						
,	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision Ar				Analysis			
1	1 Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs			
2	2 Planned Modifications - Co		Considered	Would improve service for WSCs			
3	Work and Reconfiguration to Network Control Points	28.50	Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	28.50	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP13015	23	2026	28.5				

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-047 2023 RAITH-17214-WSC						
Description						

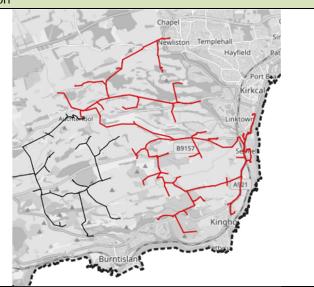

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing 0.0		Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points	32.00	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	32.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP17214	69	2026	32				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-048 2023 INNERLEITHEN-12723-WSC						
Description						




	Evidence of Relevant Optioneering						
'	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision			Analysis				
1 Do Nothing 0.00		0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Planned Modifications	-	Considered	Would improve service for WSCs			
3 Work and Reconfiguration to Network Control Points		28.50	Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	28.50	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP12723	27	2026	28.5				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-049 2023 WHITCHESTER-12413-WSC					
Description					

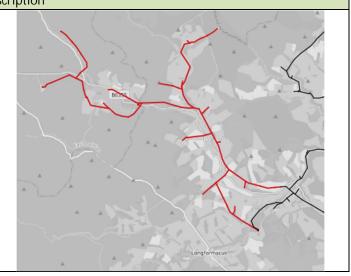


	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	1 Do Nothing 0.00 Reje		Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
Work and Reconfiguration to Network Control Points		24.00	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	24.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details								
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC								
WSC Project	Project is expected to benefit	date	Project (£k)					
SP12413	53	2026	24					

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



Background Information on WSC Projects					
WSC Project Reference Number	Year qualified	Name of WSC Project			
SPD-WSC-SA-050	2023	STRANRAER-68814-WSC			
Description					

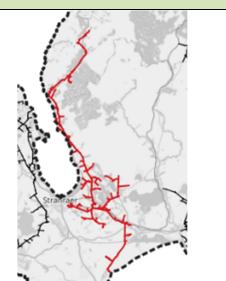

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k)		Decision	Analysis				
1	Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs			
2	Work and Peconfiguration to		Considered	Would improve service for WSCs			
3			Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	24.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions			

WSC Project Details								
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC					
WSC Project	Project is expected to benefit	date	Project (£k)					
SP68814	15	2026	24					

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects				
WSC Project Reference Number	Year qualified	Name of WSC Project		
SPD-WSC-SA-051	2022	KIRKNEWTON-96313-WSC		
Description				




	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	Do Nothing 0.00		Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points	8.00	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details						
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)			
SP96313	7	2026	8			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	-	0		



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPD-WSC-SA-052	MOREBATTLE-11614-WSC					
	Description					

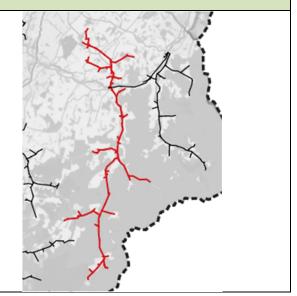


	Evidence of Relevant Optioneering					
WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision		Analysis				
1	Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs		
2	Planned Modifications			Would improve service for WSCs		
3	Work and Reconfiguration to Network Control Points			Would provide optimal improvement for WSCs		
4	Combination of options 2 & 3	24.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions		

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP11614	60	2026	44				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	21.11		



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPD-WSC-SA-053 2023 NEWMILNS-72024-WSC						
	Description						

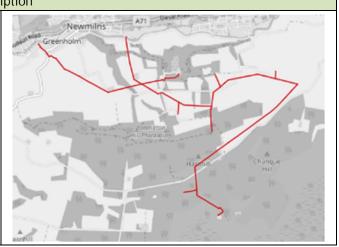


	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	1 Do Nothing 0.00 Rejected Does		Does nothing to improve the service for the WSCs					
2 Planned Modifications -		-	Considered	Would improve service for WSCs				
Work and Reconfiguration to Network Control Points 8.00 Considered		Would provide optimal improvement for WSCs						
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP72024	5	2025	39				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Completed	-	-	31/03/2025	38.09			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-054 2023 GLENDINNING-12813-WSC						
Description						

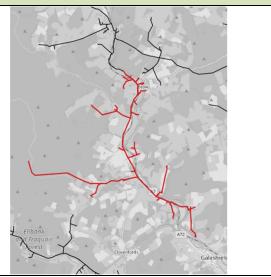


	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis				
1	1 Do Nothing 0.00 Rej		Rejected	Does nothing to improve the service for the WSCs				
2 Planned Modifications -		-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points	16.00	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	16.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP12813	26	2026	16				

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				



Background Information on WSC Projects							
WSC Project Reference Number Year qualified Name of WSC Proj							
SPD-WSC-SA-055 202		NEWCASTLETON-12313-WSC					
Description							

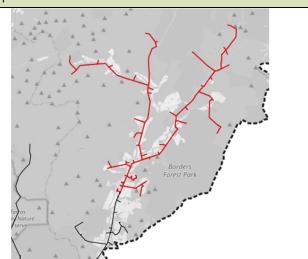

	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis								
1	1 Do Nothing 0.00 Rejected		Rejected	Does nothing to improve the service for the WSCs				
2	Planned Modifications	-	Considered	Would improve service for WSCs				
3	Work and Reconfiguration to Network Control Points 8.00		Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	8.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer interruptions				

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP12313	31	2026	8				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPD-WSC-SA-056	2024	WHITCHESTER-12412-WSC				
	D	escription				
Targeted works shall be carried to reduce interruptions for t identified as "Worst Served identification and implementa that maximise the improven customers based on an assessmand its fault histo.  The specific works being propo out are in early planning stages be determined	he customers " through the tion of solutions nent for these nent of the circuit ry. sed to be carried and so are yet to	Company of the second s				

	Evidence of Relevant Optioneering						
W	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Early planning stages	-	-	-			

WSC Project Details							
Network location of the	Expected completion	Expected cost of WSC					
WSC Project	Project is expected to benefit	date	Project (£k)				
SP12412	56	2027	-				

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPD-WSC-SA-059	2024	BROXBURN TOWN-95722-WSC				
Description						

The specific works being proposed to be carried out are in early planning stages and so are yet to be determined.



	Evidence of Relevant Optioneering						
W	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Early planning stages	-	-	-			

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
SP95722	9	2027	-			

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	1	0				

be determined.



Background Information on WSC Projects					
WSC Project Reference Number	Year qualified	Name of WSC Project			
SPD-WSC-SA-060	2024	HEATHHALL-67723-WSC			
	Descriptio	n			
Targeted works shall be carried out on the to reduce interruptions for the custo identified as "Worst Served" through identification and implementation of so that maximise the improvement for to customers based on an assessment of the and its fault history.	mers n the olutions these	Burnest A76 A76			
The specific works being proposed to be out are in early planning stages and so a		Ligharbinggs Holywood HealthGall			

	Evidence of Relevant Optioneering						
W	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Early planning stages	-	-	-			

WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
SP67723	6	2027	-				

	WSC Project Progress Update								
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)					
Planning	-	-	-	0					



Background Information on WSC Projects					
WSC Project Reference Number	Year qualified	Name of WSC Project			
SPD-WSC-SA-061	2024	STRATHAVEN-86812-WSC			
	Descri	iption			
Targeted works shall be carried out or to reduce interruptions for the cur identified as "Worst Served" throu identification and implementation of s maximise the improvement for these based on an assessment of the circuit history.	stomers ugh the olutions that customers	Sto			
The specific works being proposed to out are in early planning stages and s be determined.					

	Evidence of Relevant Optioneering					
W	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	# Option Costs (£k) Decision Analysis					
1	Do Nothing	Do Nothing 0.00 Rejected Does nothing to improve the service for the WSCs				
2	Early planning stages	-	-	-		

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC WSC Project Project is expected to benefit date Project (£k)						
SP86812 4 2027 -						

WSC Project Progress Update						
WSC Project status  Number of WSC that the delivered WSC Project is intended to benefit  Number of WSC that the delivered WSC Project benefit and delivered WSC Project benefit  Reason for variance between planned WSC Project benefit and delivery date  Actual delivery date  WSC Project (£k)						
Planning	-	-	1	0		



Background Information on WSC Projects					
WSC Project Reference Number	Year qualified	Name of WSC Project			
SPD-WSC-SA-062	2024	YETHOLM-11713-WSC			
	Description				
Targeted works shall be carried out on this reduce interruptions for the customers ide "Worst Served" through the identificat implementation of solutions that maxin improvement for these customers base assessment of the circuit and its fault have the specific works being proposed to be are in early planning stages and so are y determined.	entified as ion and nise the ed on an nistory.				

	Evidence of Relevant Optioneering					
W	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	# Option Costs (£k) Decision Analysis					
1	Do Nothing	ning 0.00 Rejected Does nothing to improve the service for the WSCs				
2	Early planning stages	-	-	-		


WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP11713							

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	1	0			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPD-WSC-SA-063 2024 AUCHNEEL PRIMARY-68923-WSC					
Description					

The specific works being proposed to be carried out are in early planning stages and so are yet to be determined.

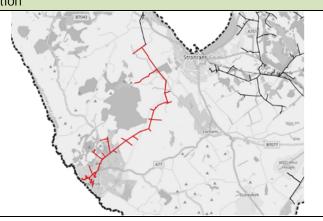

	Evidence of Relevant Optioneering					
W	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	# Option Costs (£k) Decision Analysis					
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs		
2	Early planning stages	-	-	-		

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
SP68923 2 2027 -						

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			

so are yet to be determined.



Background Information on WSC Projects							
WSC Project Reference Number	Year qualified	Name of WSC Project					
SPD-WSC-SA-064	2024	LOANING-11225-WSC					
	Γ	Description					
Targeted works shall be carried or circuit to reduce interruptions to customers identified as "Worst shrough the identification a implementation of solutions that the improvement for these custom on an assessment of the circuit an history.	for the Served" and maximise ners based	B6354 B6435 B6435					
The specific works being propose carried out are in early planning st		Standed Browns					

	Evidence of Relevant Optioneering						
W	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	Do Nothing	ning 0.00 Rejected Does nothing to improve the service for the WSCs					
2	2 Early planning stages						

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP11225							


WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-065 2024 KIRKBANK-67511-WSC						
	_					

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions.

circuit and its fault history.

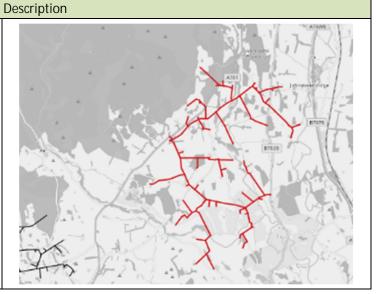

	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Leave to Mod 420 Rejected Mod Planned in ED3							
3	Additional protection works	24	Adopted	Provides optimal improvement in shortest timeframe				

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
SP67511 117 2026 24						

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified		Name of WSC Project			
SPD-WSC-SA-066	2024	KINGSLAND-11512-WSC			
		Description			
Targeted works shall be carried circuit to reduce interruption customers identified as "Wors through the identification implementation of solutions that the improvement for these custo on an assessment of the circuit a history.	s for the t Served" and t maximise mers based	Arteo Arteo Arteo			
The specific works being proposed to be carried out are in early planning stages and so are yet to be determined.		Kingsman  Kingsmandows  Kingsi Manadows  Kingsi Manadows			

	Evidence of Relevant Optioneering							
W	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00 Rejected Does nothing to improve the service for the WSCs						
2	2 Early planning stages							

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
SP11512 1 2027 -						

	WSC Project Progress Update								
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)					
Planning	-	-	-	0					



Background Information on WSC Projects					
WSC Project Reference Number	Year qualified	Name of WSC Project			
SPD-WSC-SA-067	2024	GLENLUCE-67212-WSC			
	[	Description			
Targeted works shall be carried of circuit to reduce interruptions customers identified as "Worst Servithe identification and implement solutions that maximise the improtence customers based on an assest circuit and its fault history	for the ved" through ntation of overnent for sment of the	Clinic A747			
The specific works being proposed out are in early planning stages an to be determined.		Authority			

	Evidence of Relevant Optioneering							
W	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing 0.00 Rejected Does nothing to improve the service for the WS							
2	2 Early planning stages							


WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP67212 54 2027 -							

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				



Background Information on WSC Projects							
WSC Project Reference Number Year qualified Name of WSC Project							
SPD-WSC-SA-069	2024	BARRHILL-66313-WSC					
Description							
Targeted works shall be carried ou	t on this circuit to						

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions. Additionally, part of the main, overhead line will be replaced

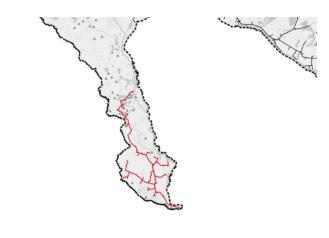

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Full Modernisation	434	Rejected	2km Section would still need reconductored				
3	Full Mainline rebuild	900	Rejected	No justified				
4	Additional Protection Works	12	Considered	ed Provides improvement				
5	Partial mainline rebuild & modernisation	90.6	Considered	ed Provides strong improvement				
6	Combination of options 4 & 5	102.6	Adopted	Provides the optimal performance upgrades for the customers.				


WSC Project Details								
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC								
WSC Project	date	Project (£k)						
SP66313								

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects						
WSC Project Reference Number   Year qualified   Name of WSC Project						
SPD-WSC-SA-070 2024 EYEMOUTH-13117-WSC						
		Description				

The specific works being proposed to be carried out are: The upgrade of part of the line to improve its resilience.

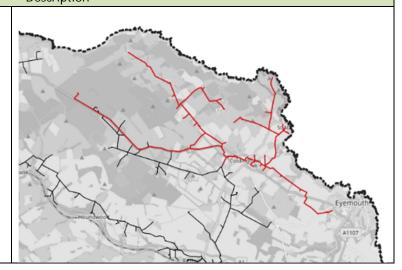

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	2 OHL rebuild as per this proposal  166.69 Adopted  Brings spur to modern specification for 2C Weather Area zone & improves storm resilience. Reduces chance of OHL faults and customer outages							

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP13117	141	2026	166.69				

WSC Project Progress Update								
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Delivery	-	-	-	8.78				




	Background Information on WSC Projects							
	WSC Project Reference Number Year qualified Name of WSC Project							
SPD-WSC-SA-071 2024 AYTON-12021-WSC								

## Description

Targeted works shall be carried out on this circuit to reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.

The specific works being proposed to be carried out are: The upgrade of part of the line to improve its resilience.

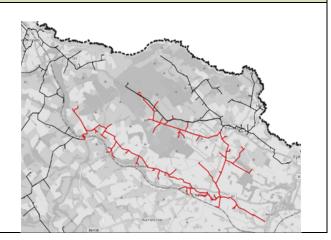

	Evidence of Relevant Optioneering								
	WSC Project options considered, costs associated with each option and analysis of the options considered								
# Option Costs (£k) Decision Analysis									
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs					
2 Onl repulled as per trils 145.27 Adopted & improv			Brings spur to modern L10 specification for 2C Weather Area zone & improves storm resilience.  Reduces chance of OHL faults and customer outages.						


WSC Project Details								
Network location of the	Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)					
SP12021	20	2026	145.27					

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	1	18.06			



Background Information on WSC Projects							
WSC Project Reference Number Year qualified Name of WSC Project							
SPD-WSC-SA-072 2024 ANSTRUTHER-19113-WSC							
	Desc	ription					

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment, which reduces the number of customers that experience a fault. Further works to increase protection on the line will also be carried out. Additionally a new cable will be run to reconfigure the network and make it more reliable

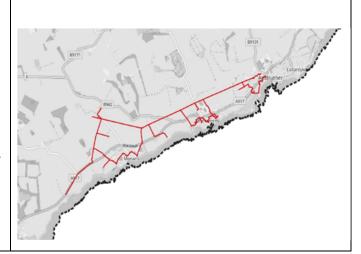

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	NCP, reconfiguration & additional protection works	402	Adopted	Best Option for WSCs on the circuit			


WSC Project Details								
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC								
WSC Project	Project is expected to benefit	date	Project (£k)					
SP19113	269	2026	402					

	WSC Project Progress Update								
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)					
Delivery	-	-	-	80.86					



Background Information on WSC Projects							
WSC Project Reference Number	Year qualified	Name of WSC Project					
SPD-WSC-SA-073	2024	PINWHERRY-74823-WSC					
Description							
	= ====						

The specific works being proposed to be carried out are: Refurbishment of the existing 11kV overhead line, replacing old plant and sections of line prone to faults including aging poles.

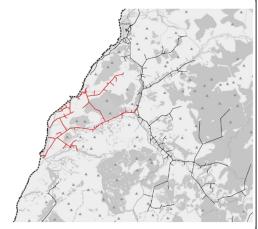

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	NCP and reconfiguration work	38	Rejected	Provides improvement in short timeframe				
3	Early Mod Improvements	1200	Approved	Provides improvements for all customers on the circuit				


WSC Project Details								
Network location of the	Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)					
SP74823	602	2026	1200					

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-074 2024 YAIR BRIDGE-10711-WSC						
	Doo	porintian				

The specific works being proposed to be carried out are in early planning stages and so are yet to be determined.

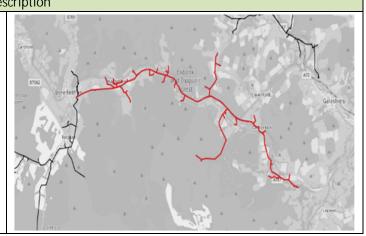

	Evidence of Relevant Optioneering						
W	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	1 Do Nothing 0.00 Rejected Does nothing to improve the service for the WS						
2	2 Early planning stages						


WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project Project is expected to benefit date Project (£k)						
SP10711	62	2027	60			

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects							
WSC Project Reference Number Year qualified Name of WSC Project							
SPD-WSC-SA-076 2024 BURNTISLAND-17014-WSC							
	Dosc	rintion					

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions.

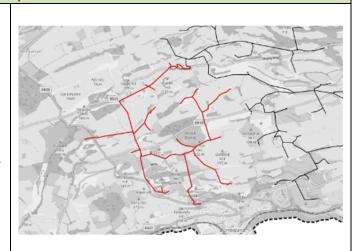

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	1 Do Nothing 0.00 Rejected Does nothing to improve the service for the V		Does nothing to improve the service for the WSCs					
2	2 NCP and reconfiguration work 16 Adopted Provides optimal improvement in shortest timeframe							

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project Project is expected to benefit date Project (£k)						
SP17014 6 2026 16						

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			

determined.



	)     £	-1: MCC Da-!1-					
Background Information on WSC Projects							
WSC Project Reference Number	Year qualified	Name of WSC Project					
SPD-WSC-SA-077	2024	PINWHERRY-74822-WSC					
	Desc	ription					
Targeted works shall be carried out reduce interruptions for the custor "Worst Served" through the ider implementation of solutions that improvement for these custome assessment of the circuit and its	ners identified as ntification and t maximise the rs based on an	Company Freez					
The specific works being proposed are in early planning stages and s		The Kirrough Forest					

	Evidence of Relevant Optioneering					
W	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	# Option Costs (£k) Decision Analysis					
1	1 Do Nothing 0.00 Rejected Does nothing to improve the service for the WS		Does nothing to improve the service for the WSCs			
2	2 Early planning stages					

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
SP74822	20	2027	20				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Informa	ation on WSC Projects
WSC Project Reference Number	Year qualified	Name of WSC Project
SPD-WSC-SA-078	2024	SORBIE-68622-WSC
	Desc	ription
Targeted works shall be carried our reduce interruptions for the custo "Worst Served" through the ide implementation of solutions the improvement for these custome assessment of the circuit and it	mers identified as entification and at maximise the ers based on an	
The specific works being proposed are in early planning stages and determined.		

	Evidence of Relevant Optioneering							
١	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	2 Early planning stages			-				

	WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of W								
	WSC Project	Project is expected to benefit	date	Project (£k)				
	SP68622	207	2027	35.07				

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				




	Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project						
SPD-WSC-SA-080 2024 TORNESS-34424-WSC						
		D.				

Description

Targeted works shall be carried out on this circuit to reduce interruptions for the customers identified as "Worst Served" through the identification and implementation of solutions that maximise the improvement for these customers based on an assessment of the circuit and its fault history.

The specific works being proposed to be carried out are in early planning stages and so are yet to be determined.

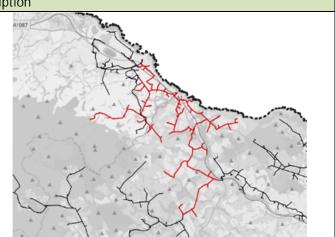

	Evidence of Relevant Optioneering							
W	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Early planning stages	-	-	-				


WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
SP34424	110	2027	110			

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
	WSC Project Reference Number Year qualified Name of WSC Project						
Ī	SPD-WSC-SA-082 2024 NEWTON STEWART-68423-WSC						
ĺ	Description						

The specific works being proposed to be carried out are: Additional protection on system and strategic deployment of additional Network Control Equipment, which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions.

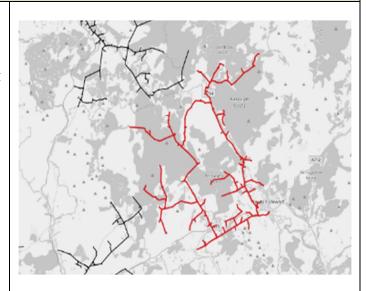

	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Not taken	Does nothing to improve the service for the WSCs				
2	Leave to Mod -		Rejected	Line is not planned to be rebuilt till after 2028				
3	3 Additional protection works 9.10		Adopted	Provides optimal improvement in shortest timeframe				

WSC Project Details								
Network location of the	Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)					
SP68423	63	2026	9.10					

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Planning	-	-	-	0				



## 4.2. SP Manweb

SP Manweb covers Merseyside, Shropshire, Cheshire, and North & Mid Wales. The below figures show the areas covered along with a view of where the current WSC circuits with open schemes are:

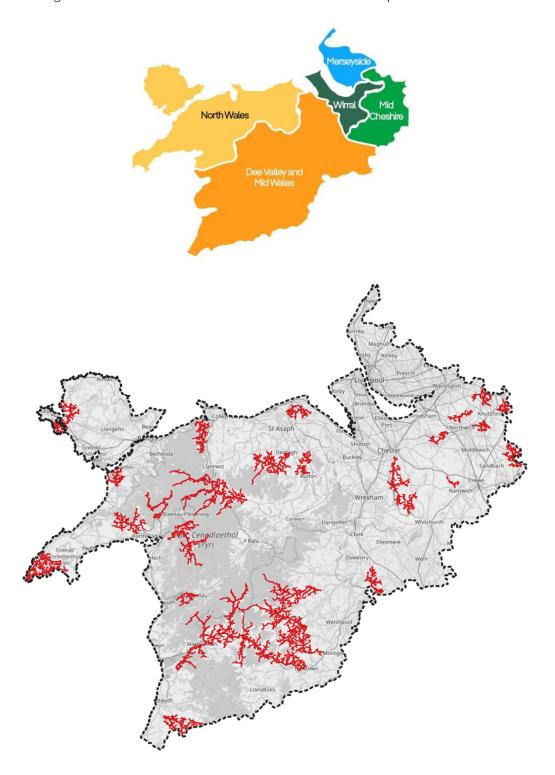



Figure 2a & 1b - Map View of SP Manweb with District & current ED2 WSC schemes.



District	Primary Substation	Project Name	Page
Dee Valley & Mid Wales	BOTWNNOG	BOTWNNOG-83603-WSC	116
Dee Valley & Mid Wales	CAERSWS	CAERSWS-92404-WSC	110
Dee Valley & Mid Wales	CEMMAES ROAD	CEMMAES ROAD-1301-WSC	98
Dee Valley & Mid Wales	CEMMAES ROAD	CEMMAES ROAD-1302-WSC	118
Dee Valley & Mid Wales	DOLGELLAU	DOLGELLAU-202-WSC	92
Dee Valley & Mid Wales	GLAN-YR-AFON	GLAN-YR-AFON-4A605-WSC	111
Dee Valley & Mid Wales	LLANDYRNOG	LLANDYRNOG-71001-WSC	127
Dee Valley & Mid Wales	LLANFAIR CAEREINION	LLANFAIR CAEREINION-91703-WSC	105
Dee Valley & Mid Wales	LLANFYLLIN	LLANFYLLIN-90604-WSC	87
Dee Valley & Mid Wales	LLANILAR	LLANILAR-1101-WSC	121
Dee Valley & Mid Wales	MACHYNLLETH	MACHYNLLETH-404-WSC	89
Dee Valley & Mid Wales	MACHYNLLETH	MACHYNLLETH-405-WSC	101
Mid Cheshire	ACTON	ACTON-63306-WSC	103
Mid Cheshire	ANDERTON	ANDERTON-60501-WSC	102
Mid Cheshire	CAERSWS	CAERSWS-92401-WSC	126
Mid Cheshire	DUCKINGTON	DUCKINGTON-63603-WSC	95
Mid Cheshire	EDEN VALE	EDEN VALE-64501-WSC	96
Mid Cheshire	LCWW HUNTINGTON	LCWW HUNTINGTON-45909-WSC	125
Mid Cheshire	LOSTOCK GRID	LOSTOCK GRID-60805-WSC	94
Mid Cheshire	MANOD	MANOD-83502-WSC	123
Mid Cheshire	MERE	MERE-60204-WSC	108
Mid Cheshire	MOBBERLEY	MOBBERLEY-60301-WSC	109
Mid Cheshire	SMALLWOOD	SMALLWOOD-62102-WSC	97
Mid Cheshire	WEST FELTON	WEST FELTON-92704-WSC	124
North Wales	BETWS-Y-COED	BETWS-Y-COED-76502-WSC	90
North Wales	BETWS-Y-COED	BETWS-Y-COED-76503-WSC	88
North Wales	BETWS-Y-COED	BETWS-Y-COED-76504-WSC	91
North Wales	BOTWNNOG	BOTWNNOG-83604-WSC	115
North Wales	BOTWNNOG	CAERGEILIOG GRID-80705-WSC	117
North Wales	BRYN STANLEY	BRYN STANLEY-72702-WSC	106
North Wales	CAERGEILIOG GRID	CAERGEILIOG GRID-80701-WSC	114
North Wales	CEMMAES ROAD	CEMMAES ROAD-1303-WSC	119
North Wales	CHOWLEY	CHOWLEY-46003-WSC	128
North Wales	CONWY	CONWY-75304-WSC	120
North Wales	CWM DYLI	CWM DYLI-82404-WSC	93
North Wales	DOLGARROG GRID	DOLGARROG GRID-76301-WSC	99
North Wales	GRAIG FAWR	GRAIG FAWR-73002-WSC	113
North Wales	LLANSANNAN	LLANSANNAN-70202-WSC	112
North Wales	MAENTWROG GRID	MAENTWROG GRID-83302-WSC	122
North Wales	RHOSLAN	RHOSLAN-83004-WSC	107
North Wales	RUTHIN	RUTHIN-71605-WSC	104
North Wales	ST HELENS ROAD	ST HELENS ROAD-81704-WSC	100



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-001 2022 LLANFYLLIN-90604-WSC						
Description						

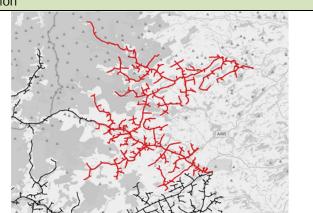


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	75.41	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost			

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
MW90604	176	2026	75.41			

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Delivery	-	-	1	14.10				



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-002 2023 BETWS-Y-COED-76503-WSC						
Description						

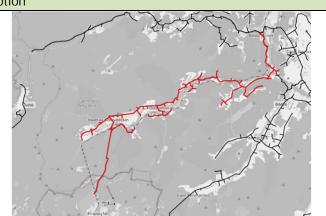

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	41.91	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost			


WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
MW76503	329	2026	568.91			

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Delivery	-	-	-	23.36				



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-003 2022 MACHYNLLETH-00404-WSC						
Description						

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements., the modernisation of the circuit to provide a higher quality of supply and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

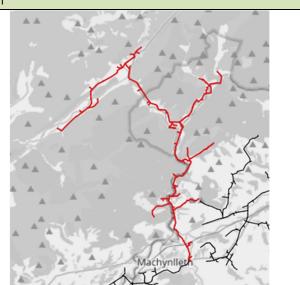

	Evidence of Relevant Optioneering							
,	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis				
1 Do Nothing 0.00 Rejected Does nothing		Does nothing to improve the service for the WSCs						
2	Vegetation Management	58.00	Considered	Protects lines from contacting trees and reduces customer minutes lost				
3	Modernisation of Circuit 1120		Considered	Would provide a higher quality supply for WSCs				
4	Work and Reconfiguration to Network Control Points	72.00	Considered	Would provide improvement for WSCs				
5	Combination of options 2, 3 & 4	1249.98	Adopted	Best option available - encompasses above and best impact for WSCs				


WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
MW00404	567	2026	1249.98			

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Delivery	-	-	-	174.93				



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-004 2022 BETWS-Y-COED-76502-WSC						
Description						

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements. and the strategic deployment of additional Network Control Equipment which reduces the number of customers that experience a fault.

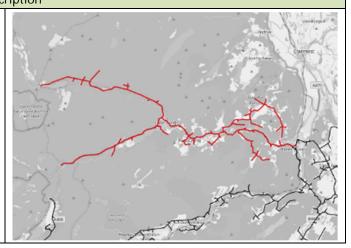

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis								
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	2 Vegetation Management 32.11 Ado		Adopted	Protects lines from contacting trees and reduces customer minutes lost				
3	Work and Reconfiguration to Network Control Points	11.43	Considered	Would provide optimal improvement for WSCs				
4	Combination of options 2 & 3	43.54	Adopted	Best option available - Provides optimal improvements for WSCs				


WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
MW76502	188	2026	54.97				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	32.78		



	Background Information on WSC Projects						
	WSC Project Reference Number Year qualified Name of WSC Project						
Ī	SPM-WSC-SA-005 2023 BETWS-Y-COED-76504-WSC						
Ī	Description						

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements., the modernisation of the circuit to provide a higher quality of supply and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

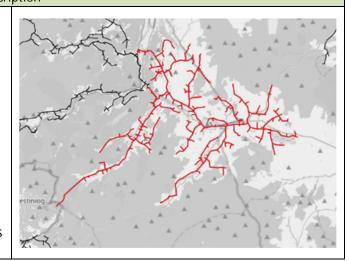

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Vegetation Management	61.7	Considered	Protects lines from contacting trees and reduces customer minutes lost				
3	Modernisation of Circuit	498.00	Considered	Would provide a higher quality supply for WSCs				
4	Work and Reconfiguration to Network Control Points	23.12	Considered	Would provide improvement for WSCs				
5	Combination of options 2, 3 & 4	582.82	Adopted	Best option available - encompasses above and best impact for WSCs				

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
MW76504	423	2026	582.82			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	586.04		



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-006 2023 DOLGELLAU-00202-WSC					
Description					




	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis								
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Vegetation Management	16.72	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost				

WSC Project Details					
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC					
WSC Project Project is expected to benefit date Project (£k)					
MW00202	50	2026	16.72		

	WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)				
Delivery	-	-	-	9.38				



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-007 2023 CWM DYLI-82404-WSC						
Description						

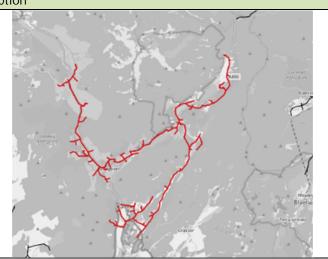

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	59.35	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost			

WSC Project Details					
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC					
WSC Project	Project is expected to benefit	date	Project (£k)		
MW82404	230	2026	59.35		

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	27.01			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-008 2021 LOCKSTOC GRID-60805-WSC						
Description						



	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Vegetation Management	24.79	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost				


WSC Project Details					
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC					
WSC Project	Project is expected to benefit	date	Project (£k)		
MW60805	99	2026	24.79		

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	1	0			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-009 2021 DUCKINGTON-63603-WSC						
Description						

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements., the modernisation of the circuit to provide a higher quality of supply and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

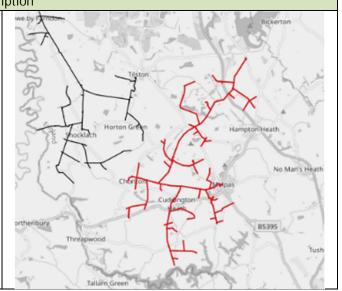

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
# Option Costs (£k) Decision Analysis				Analysis				
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs				
2	Vegetation Management	36.47	Considered	Protects lines from contacting trees and reduces customer minutes lost				
3	Modernisation of Circuit	523.00	Considered	Would provide a higher quality supply for WSCs				
4	Work and Reconfiguration to Network Control Points	40.00	Considered	Would provide improvement for WSCs				
5	Combination of options 2, 3 & 4	599.47	Adopted	Best option available - encompasses above and best impact for WSCs				

WSC Project Details					
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC					
WSC Project Project is expected to benefit date Project (£k)					
MW63603	158	2025	599.47		

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Complete	-	-	31/03/2025	14.41	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-010 2020 EDEN VALE-64501-WSC					
Description					




	Evidence of Relevant Optioneering					
	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	# Option Costs (£k) Decision Analysis					
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs		
2	Vegetation Management	34.04	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost		

WSC Project Details						
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)			
MW64501	28	2025	34.04			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	1	0			



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-011 2023 SMALLWOOD-62102-WSC						
Description						

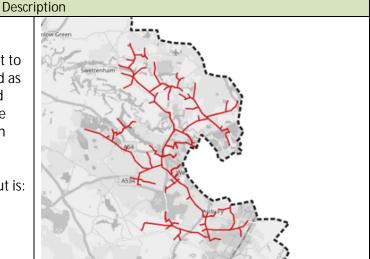

	Evidence of Relevant Optioneering					
	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	Option	Costs (£k)	Decision	Analysis		
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs		
2	Vegetation Management	50.24	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost		


WSC Project Details						
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)			
MW62102	30	2026	50.24			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPM-WSC-SA-012 2023 CEMMAES ROAD-01301-WSC						
	Description						

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements. and the strategic deployment of additional Network Control Equipment which reduces the number of customers that experience a fault.

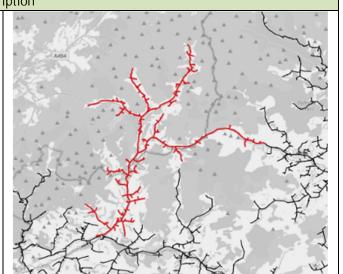


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
# Option Costs (£k) Decision			Decision	Analysis			
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	73.76	Considered	Protects lines from contacting trees and reduces customer minutes lost			
3	Work and Reconfiguration to Network Control Points	14.46	Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	88.09	Adopted	Best option available - Provides optimal improvements for WSCs			

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	date	Project (£k)				
MW01301 29		2026	102.55			

	WS	SC Project Progress Update		
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)
Planning	-	-	-	0



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPM-WSC-SA-013	2017	DOLGARROG GRID-76301-WSC				
Description						

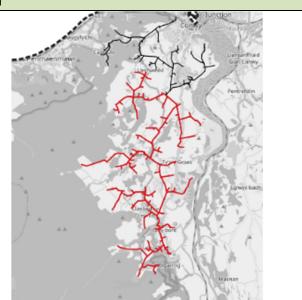

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	I Decision I Analysis				
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	39.66	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost			


WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
MW76301	7	2026	39.66			

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Planning	-	-	-	0	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-014 2019 ST HELENS ROAD-81704-WSC					
Description					

The specific works being proposed to be carried out are: Vegetation management over and above our statutory (ENA TS 43/8) requirements., the modernisation of the circuit to provide a higher quality of supply and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

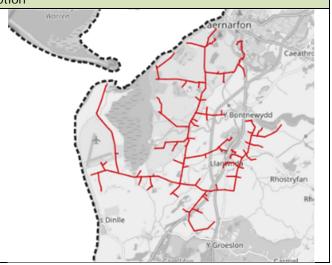


	Evidence of Relevant Optioneering						
,	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Analysis					
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	41.91	Considered	Protects lines from contacting trees and reduces customer minutes lost			
3	Modernisation of Circuit	854.00	Considered	Would provide a higher quality supply for WSCs			
4	Work and Reconfiguration to Network Control Points	42.00	Considered	Would provide improvement for WSCs			
5	Combination of options 2, 3 & 4	937.91	Adopted	Best option available - encompasses above and best impact for WSCs			

WSC Project Details						
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC						
WSC Project	Project is expected to benefit	date	Project (£k)			
MW81704	412	2026	937.91			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	72.22		



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPM-WSC-SA-015	2021	MACHYNLLETH-00405-WSC				
Description						

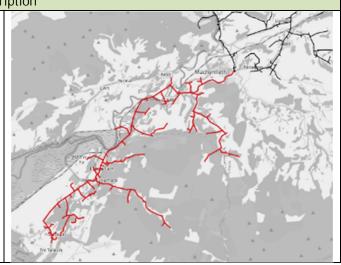

	Evidence of Relevant Optioneering					
	WSC Project options considered, costs associated with each option and analysis of the options considered					
#	Option	Costs (£k)	Decision	Analysis		
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs		
2	Vegetation Management	57.98	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost		


WSC Project Details							
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC				
WSC Project	Project is expected to benefit	date	Project (£k)				
MW00405	200	2026	57.98				

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	21.74			



Background Information on WSC Projects						
WSC Project Reference Number	Year qualified	Name of WSC Project				
SPM-WSC-SA-016 2021 ANDERTON-60501-WSC						
Description						

The specific works being proposed to be carried out are: The addition of shrouding to reduce the risk of bird and vermin strikes and the strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

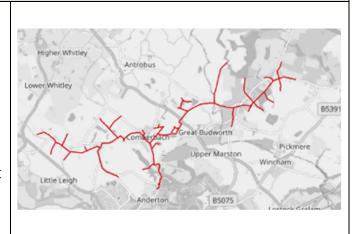

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Apply Shrouding	7.00	Considered	Would improve service for WSCs			
3	Work and Reconfiguration to Network Control Points	97.00	Considered	Would provide optimal improvement for WSCs			
4	Combination of options 2 & 3	104.00	Adopted	Best option available - Provides optimal improvements for WSCs whilst reducing customer minutes lost			

WSC Project Details						
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)			
MW60501	195	2026	104			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	0			



	Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project							
	SPM-WSC-SA-017 2020 ACTON-63306-WSC						
	Description						

The specific works being proposed to be carried out are: The modernisation of the circuit to provide a higher quality supply for customers.



	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision			Analysis			
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Modernisation of Circuit	167.00	Adopted	Best option available - Would provide a higher quality supply for WSCs			


WSC Project Details						
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)			
MW63306	23	2026	167			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	0			



	Background Information on WSC Projects						
	WSC Project Reference Number	Name of WSC Project					
SPM-WSC-SA-018 2023			RUTHIN-71605-WSC				
	Description						

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

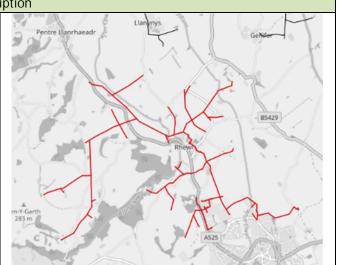

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Work and Reconfiguration to Network Control Points	12.41	Adopted	Best option available - Provides optimal improvements for WSCs			


WSC Project Details						
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC			
WSC Project	Project is expected to benefit	date	Project (£k)			
MW71605	222	2025	12.41			

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Completed	-	-	31/03/2025	0			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-019 2023 LLANFAIR CAEREINION-91703-WSC					
	Doca	cintion			

The specific works being proposed to be carried out are: The strategic deployment of additional Network Control Equipment which reduces the amount of customers that experience a fault.

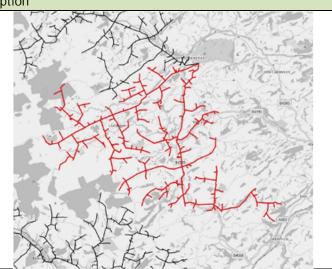

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1 Do Nothing 0.00 Rejected Does nothing to improve the se WSCs			Does nothing to improve the service for the WSCs				
2	Work and Reconfiguration to Network Control Points	46.78	Adopted	Best option available - Provides optimal improvements for WSCs			


WSC Project Details				
Network location of the	Number of WSC planned WSC	Expected completion	Expected cost of WSC	
WSC Project	Project is expected to benefit	date	Project (£k)	
MW91703	106	2026	165.39	

	WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Delivery	-	-	-	2.18			



Background Information on WSC Projects					
WSC Project Reference Number  Year qualified Name of WSC Project					
SPM-WSC-SA-020 2023 BRYN STANLEY-72702-WSC					
	Description				

The specific work being proposed to be carried out is: Additional protection on system and strategic deployment of additional Network Control Equipment, which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions.

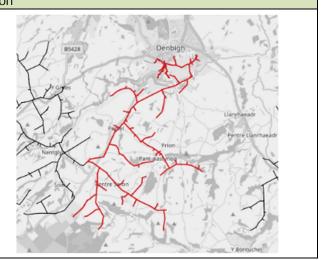

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	1 Do Nothing 0.00 Rejected No improvement for WSC						
2	Network control point work and reconfiguration  Network control point work and reconfiguration  Network control point work and reconfiguration  3.06  Adopted  Provides optimal improvements in the shortest timeframe						


WSC Project Details					
Network location of the WSC Project is expected to benefit  Number of WSC planned WSC Expected completion date  Expected completion date  Project (£k)					
MW72702	47	2025	3.06		

	WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-021 2023 RHOSLAN-83004-WSC					
	Docari	ntion			

The specific work being proposed to be carried out is:
Additional protection on system and strategic
deployment of additional Network Control
Equipment, which reduces the amount of customers
that experience a fault and specifically timed work to
reduce the amount of customer interruptions.

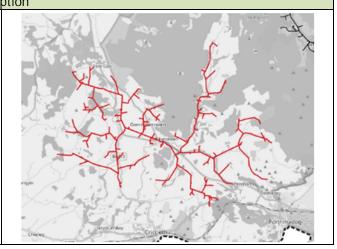

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	1 Do Nothing 0.00 Rejected No improvement for WSC						
Network control point work and reconfiguration  Network control point work and reconfiguration  27.24 Adopted Provides optimal improvements in the shortest timeframe							


	WSC Project Details				
Network location	Number of WSC planned WSC Project is	Expected	Expected cost of WSC		
of the WSC Project	expected to benefit	completion date	Project (£k)		
MW83004	1	2025	29.51		

	WS	SC Project Progress Update		
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)
Completed	-	-	31/03/2025	0



Background Information on WSC Projects			
WSC Project Reference Number	Year qualified	Name of WSC Project	
SPM-WSC-SA-022	2019	MERE-60204-WSC	

The specific work being proposed to be carried out is: Additional protection on system and strategic deployment of additional Network Control Equipment, which reduces the amount of customers that experience a fault and specifically timed work to reduce the amount of customer interruptions.

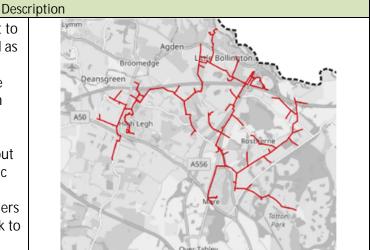


	Evidence of Relevant Optioneering				
WSC Project options considered, costs associated with each option and analysis of the options considered				with each	
				red	
	#	Option	Costs (£k)	Decision	Analysis
	1	Do Nothing	0.00	Rejected	No improvement for WSC
	2	Network control point work and reconfiguration	4.94	Adopted	Provides optimal improvements in the shortest timeframe

WSC Project Details				
	Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)
	MW60204	6	2025	8.37

WSC Project Progress Update				
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)
Completed	-	-	31/03/2025	0



	Background Information on WSC Projects				
	WSC Project Reference Number	Year qualified	Name of WSC Project		
SPM-WSC-SA-023 2020 MOBBERLEY-60301-WSC					
	Description				

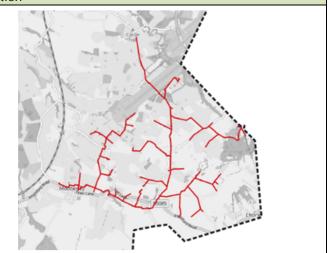


	Evidence of Relevant Optioneering					
WSC Project options considered, costs associated with each						
option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis		
1	Do Nothing	0.00	Rejected	No improvement for WSC		
2	Network control point work and reconfiguration	6.88	Adopted	Provides optimal improvements in the shortest timeframe		

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
MW60301	193	2025	4.85		

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



	Background Information on WSC Projects				
WSC Project Reference Number Year qualified Name of WSC Project					
	SPM-WSC-SA-024	2017	CAERSWS-92404-WSC		

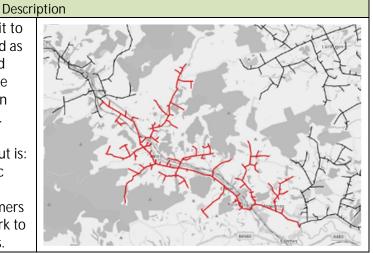

	Evidence of Relevant Optioneering					
	WSC Project options considered, costs associated with each					
	option and analysis of the options considered					
#	Option	Costs (£k)	Decision	Analysis		
1	Do Nothing	0.00	Rejected	No improvement for WSC		
2	Network control point work and reconfiguration	22.28	22.28 Adopted Provides optimal improvements timeframe			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
MW92404	25	2025	18.37		

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



Background Information on WSC Projects				
WSC Project Reference Number Year qualified Name of WSC Project				
SPM-WSC-SA-025 2023 GLAN-YR-AFON-4A605-WSC				
Description				




Evidence of Relevant Optioneering								
		WSC Project options considered, costs associated with each						
	option and analysis of the options considered							
	#	Option	Costs (£k)	Decision	Analysis			
	1	1 Do Nothing		Rejected	No improvement for WSC			
	2	Network control point work and reconfiguration (21, 22, 23)  Network control point work and reconfiguration (24)  8.1824  6.99053		9.1824 Adopted Provides optimal in shortest t				
	4			Adopted	Provides optimal improvements in the shortest timeframe			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
MW4A605	6	2026	14.84		

WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)
Delivery	-	-	-	0



Background Information on WSC Projects				
WSC Project Reference Number	Year qualified	Name of WSC Project		
SPM-WSC-SA-026	2020	LLANSANNAN-70202-WSC		
Description				

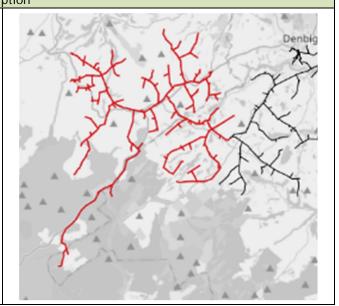


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	optior	n and analysis of t	he options consid	ered				
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	60.30	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
MW70202	22	2025	50.04		

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



Background Information on WSC Projects				
WSC Project Reference Number  Year qualified Name of WSC Project				
SPM-WSC-SA-027 2020 GRAIG FAWR-73002-WSC				
	Description			

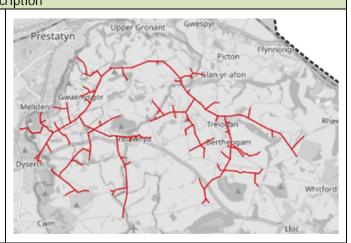


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option and analysis of the options considered						
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	13.12	Adopted	Provides optimal improvements in the shortest timeframe			

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
MW73002	430	2025	9.72			

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Completed	-	-	31/03/2025	0	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-028 2019 CAERGEILIOG GRID-80701-WSC					
	Description				

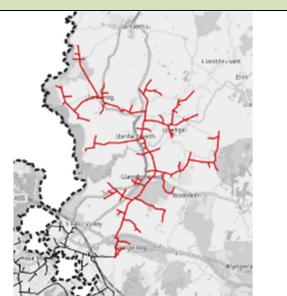


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	option a	and analysis of t	he options consi	idered			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	15.11	Adopted	Provides optimal improvements in the shortest timeframe			

WSC Project Details						
Network location of Number of WSC planned WSC Project is Expected completion Expected cost of WSC						
the WSC Project	expected to benefit	date	Project (£k)			
MW80701	22	2025	12.26			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



Background Information on WSC Projects					
WSC Project Reference Number  Year qualified Name of WSC Project					
SPM-WSC-SA-029 2023 BOTWNNOG-83604-WSC					
Description					

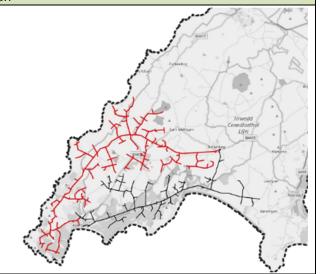


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	option and analysis of the options considered							
# Option		Costs (£k)	Decision	Analysis				
1 Do Nothing		0.00	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	41.13	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
MW83604	354	2025	35.54			

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Completed	-	-	31/03/2025	0		



Background Information on WSC Projects						
WSC Project Reference Number   Year qualified   Name of WSC Project						
SPM-WSC-SA-030 2024 BOTWNNOG-83603-WSC						
Description						

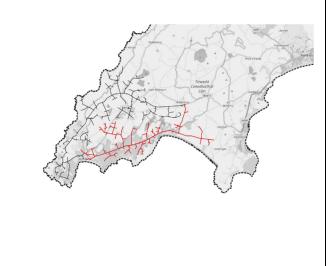


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	optio	on and analysis of t	he options consider	red				
# Option		Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	16.19	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
MW83603	317	2026	16.19			

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	1	0			



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-031 2024 CAERGEILIOG GRID-80705-WSC					

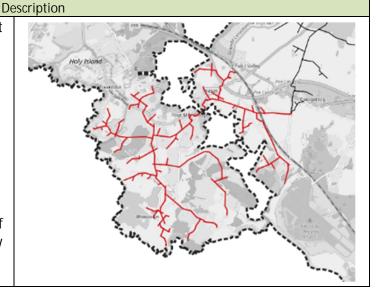


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	optio	on and analysis of t	he options conside	red				
# Option		Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	49.87	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details							
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)				
MW80705	19	2026	49.87				

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



Background Information on WSC Projects			
WSC Project Reference Number Year qualified Name of WSC Project			
SPM-WSC-SA-032	2024	CEMMAES ROAD-1302-WSC	

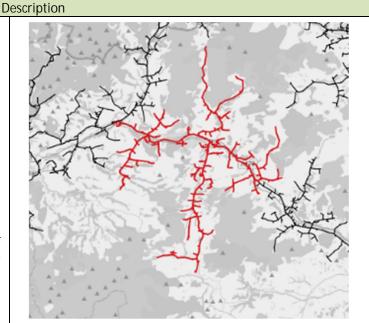

		Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each							
	option and analysis of the options considered							
	#	Option	Costs (£k)	Decision	Analysis			
1 Do Nothing		Do Nothing	0.00	Rejected	No improvement for WSC			
	2	Network control point work and reconfiguration	60.61	Adopted	Provides optimal improvements in the shortest timeframe			

	WSC Project Details		
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)
MW1302	22	2026	60.61

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	-	50.09	

customer interruptions.



		Background Inf	formation on WSC Projects
WSC Project Reference Number Year qualified		Year qualified	Name of WSC Project
	SPM-WSC-SA-033	2024	CEMMAES ROAD-1303-WSC
			Description
	Targeted works shall be carr circuit to reduce interruptions for identified as "Worst Served identification and implementation that maximise the improver customers based on an assection circuit and its fault has circuit and circuit and its fault has circuit and circ	for the customers I" through the ation of solutions ment for these assment of the	Course Co
	The specific work being propo- out is: Additional protection strategic deployment of addi Control Equipment, which red of customers that experien specifically timed work to redu	on system and tional Network uces the amount ce a fault and	Darken Darken


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	optio	on and analysis of t	he options consider	red			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	Do Nothing 0.00 Rejected	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	12.63	Adopted	Provides optimal improvements in the shortest timeframe			

WSC Project Details					
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
MW1303	8	2026	12.63		

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Planning	-	-	-	0	



Background Information on WSC Projects				
WSC Project Reference Number Year qualified Name of WSC Project				
SPM-WSC-SA-034 2024 CONWY-75304-WSC				
Description				

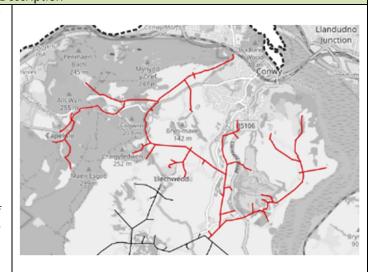


	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each						
	optio	on and analysis of t	he options consider	red			
#	Option	Costs (£k)	Decision	Analysis			
1	Do Nothing	0.00	Rejected	No improvement for WSC			
2	Network control point work and reconfiguration	9.33	Adopted	Provides optimal improvements in the shortest timeframe			

WSC Project Details						
	Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
	MW75304	13	2026	9.33		

WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)
Planning	-	-	-	0



Background Information on WSC Projects				
WSC Project Reference Number Year qualified Name of WSC Project				
SPM-WSC-SA-035	2024	LLANILAR-1101-WSC		
Description				

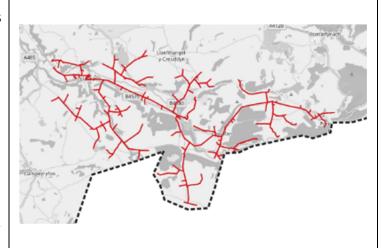


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	optio	on and analysis of t	he options consider	red				
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	6.25	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details						
Network location of the WSC Project is expected to benefit		Expected completion date	Expected cost of WSC Project (£k)			
MW1101	25	2026	6.25			

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Planning	-	-	-	0	



Background Information on WSC Projects				
WSC Project Reference Number	Year qualified	Name of WSC Project		
SPM-WSC-SA-036	2024	MAENTWROG GRID-83302-WSC		

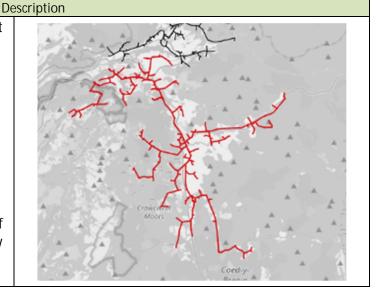


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	optio	on and analysis of t	he options consider	red				
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	12.93	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details						
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)			
MW83302	9	2026	12.93			

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Planning	-	-	-	0	



Background Information on WSC Projects				
WSC Project Reference Number Year qualified Name of WSC Project				
SPM-WSC-SA-037 2024 MANOD-83502-WSC				
Description				

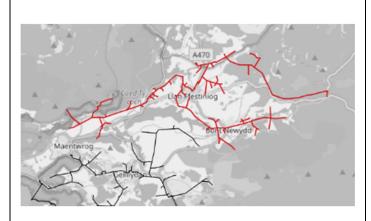


	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each							
	optio	on and analysis of t	he options consider	red				
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
2	Network control point work and reconfiguration	12.93	Adopted	Provides optimal improvements in the shortest timeframe				

WSC Project Details						
	Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)		
	MW83502	1	2026	12.93		

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	1	40.78	



Background Information on WSC Projects					
WSC Project Reference Number Year qualified Name of WSC Project					
SPM-WSC-SA-038 2024 WEST FELTON-92704-WSC					

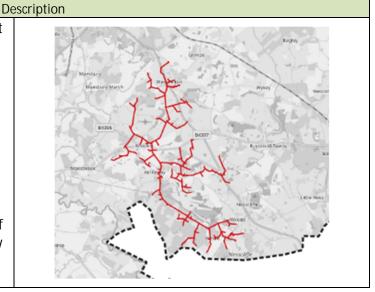


	Evidence of Relevant Optioneering								
	WSC Project options considered, costs associated with each								
	option and analysis of the options considered								
#	# Option Costs (£k) Decision Analysis								
1 Do Nothing 0.00 Rejected No improvement for WSC									
2	Network control point work and reconfiguration  Network control point work and reconfiguration  Network control point work and reconfiguration  Network control point work the shortest timeframe								

WSC Project Details							
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)				
MW92704	2	2026	13.58				

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Planning	-	-	1	0		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-039 2024 LCWW HUNTINGTON-45909-WSC						

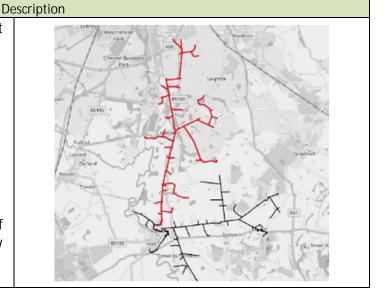

Evidence of Relevant Optioneering								
WSC Project options considered, costs associated with each								
	optio	on and analysis of t	he options consider	red				
#	Option	Costs (£k)	Decision	Analysis				
1	Do Nothing	0.00	Rejected	No improvement for WSC				
Leave to modernisation of full circuit, including rebuild of the mainline		full circuit, including rebuild 825 Rejected	Rejected	Already modernised in 2019				
3	Carry out undergrounding and additional NCP points as a WSC project	TBC	Proposed Design based on fault activity, increase number of NCP points to further reduce Cl's	Poor performance of circuit is due to frequent faults on an overhead section by EATON BOAT, Additional NCP points proposed to minimise effect of non-condition related				

WSC Project Details							
Network location of the WSC Project	Number of WSC planned WSC Project is expected to benefit	Expected completion date	Expected cost of WSC Project (£k)				
MW45909	188	2026					

WSC Project Progress Update							
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)			
Planning	-	-	-	0			



	Background Int	formation on WSC Projects				
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-040	2024	CAERSWS-92401-WSC				
Description						
Targeted works shall be carredircuit to reduce interrup customers identified as "Wors' the identification and implesolutions that maximise the inthese customers based on an acircuit and its fault has the specific work being proposed out is: Vegetation managemer our statutory (ENA TS 43/8)	tions for the t Served" through ementation of emprovement for essessment of the history.  sed to be carried at over and above	Caersws A489 Dyfi Millorg Newtown Vaynor Mochdre Industrial				

	Evidence of Relevant Optioneering							
	WSC Project options considered, costs associated with each option and analysis of the options considered							
#	# Option Costs (£k) Decision Analysis							
1	Do Nothing	0.00	0.00 Rejected Does nothing to improve the service for the WSCs					
2	2 Vegetation Adopted Best option available - Protects lines from contacting trees and reduces customer minutes lost							

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project Project is expected to benefit date Project (£k)							
MW92401 193 2026 13.77							

WSC Project Progress Update						
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	13.77		



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-041 2024 LLANDYRNOG-71001-WSC						
Description						

The specific work being proposed to be carried out is: Vegetation management over and above our statutory (ENA TS 43/8) requirements.



	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	6.24	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost			


WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
MW71001	107	2026	6.24				

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Reason for variance between planned WSC Project benefit and delivered WSC Project benefit	Actual delivery date	Annual cost of the WSC Project (£k)	
Delivery	-	-	-	6.24	



Background Information on WSC Projects						
WSC Project Reference Number Year qualified Name of WSC Project						
SPM-WSC-SA-042 2024 CHOWLEY-46003-WSC						

The specific work being proposed to be carried out is: Vegetation management over and above our statutory (ENA TS 43/8) requirements.

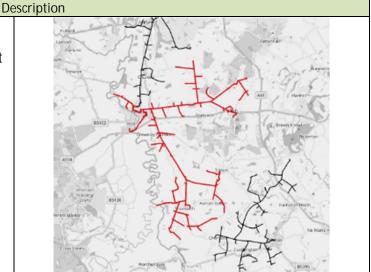

	Evidence of Relevant Optioneering						
	WSC Project options considered, costs associated with each option and analysis of the options considered						
#	# Option Costs (£k) Decision Analysis						
1	Do Nothing	0.00	Rejected	Does nothing to improve the service for the WSCs			
2	Vegetation Management	9.49	Adopted	Best option available - Protects lines from contacting trees and reduces customer minutes lost			

WSC Project Details							
Network location of the Number of WSC planned WSC Expected completion Expected cost of WSC							
WSC Project	Project is expected to benefit	date	Project (£k)				
MW46003	21	2026	9.49				

WSC Project Progress Update					
WSC Project status	Number of WSC that the delivered WSC Project is intended to benefit	Actual delivery date	Annual cost of the WSC Project (£k)		
Delivery	-	-	-	9.49	